


# Water Jetting Accessory--HP Hose

## High pressure hose

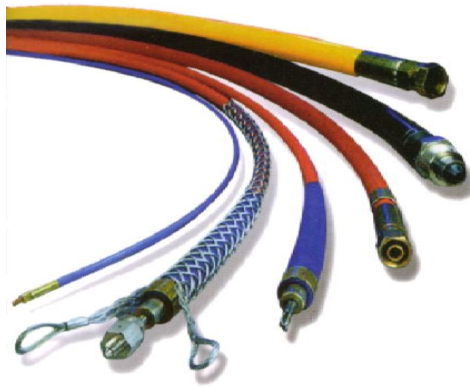

Parker (USA)

SPIR STAR(Germany)

### APPLICATION:

High pressure rubber hose and Resin hose are widely used in Water jetting cleaning and Fluid transmission.

### CONTINUOUS-SERVICE

### TEMPERATURE RANGE

+15°F / +275°F -10°C / +135°C

### MAX OPERATING TEMPERATURE

(Intermittent service) 300°F 150°C

### RECOMMENDED FLUIDS:

Water, mineral oils, vegetable and rape seed oils, glycol

and polyglycol based oils, synthetic ester based oils, oils in aqueous emulsion

### Parker (USA) high pressure hose

No.	Model	In.Dia	Out.Dia	Head Dia	Working pressure	Burst Pressure	Min. Bend Radius	Weight	Fitting
1	HY-120-4P	4.0	7.7	11	1200	3000	75	0.10	M8X1.25
2	HY-140-4P	4.0	10	15	1400	3500	55	0.16	1/4NPT
3	HY-280-4P	4.0	12	18	2800	7000	140	0.29	3/8-24UNF-LH
4	HY-280-5P	5.0	13.2	30	2800	7000	200	0.47	3/8-24UNF-LH
5	HY-110-6P	6.3	11.5	16	1100	2750	110	0.20	M10X1
6	HY-164-6P	6.3	12.5	18	1640	4100	155	0.33	3/8-24UNF-LH
7	HY-250-8P	8.0	17.2	32	2500	6250	200	0.83	9/16-18UNF-LH
8	HY-280-8P	8.0	17.3	32	2800	7000	230	0.9	9/16-18UNF-LH
9	HY-160-10P	10.0	21.6	29	1600	4000	95	0.94	M24×1.5FO
10	HY-110-13P	13.0	23	34	1100	2750	100	0.8	M24×1.5FO
11	HY-140-13P	13.0	25	34	1400	3500	110	1.19	M24×1.5FO
12	HY-210-13P	13.0	26.7	36.5	2100	5250	290	1.64	M24×1.5FO
13	HY-100-20P	19.6	30	53.5	1000	2500	250	1.39	M36×2FO
14	HY-140-20P	19.6	33	53.5	1400	3500	350	2.1	M36×2FO
15	HY-160-20P	19.8	33.7	53.5	1600	4000	350	2.28	M36×2FO

# Water Jetting Accessory--HP Hose

## High Pressure Rubber Hose



### APPLICATION:

High pressure rubber hose and Resin hose are widely used in Water jetting cleaning and Fluid transmission.

#### Recommended Fluids:

Water, mineral oils, vegetable and rape seed oils, glycol and polyglycol based oils, synthetic ester based oils, oils in aqueous emulsion

### SPIR STAR(Germany) high pressure hose

No.	Model	In.Dia	Out.Dia	Head Dia	Working pressure	Burst Pressure	Min. Bend Radius	Weight (kg/m)	Fitting
1	HY-100-3S	3.4	6.9	8.9	1000	2500	60	0.072	M6x1
2	HY-120-4S	4.0	8.0	10.1	1200	3000	75	0.11	M8x1.25
3	HY-216-4S	4.0	10.3	14.7	2160	5400	130	0.234	3/8-24UNF-LH
4	HY-104-5S	5.0	9.4	12.9	1040	2600	95	0.125	M10x1
5	HY-180-5P	5.0	11.2	15	1800	4500	150	0.26	3/8-24UNF-LH
6	HY-280-5P	4.6	14.4	19.7	2800	7000	220	0.563	3/8-24UNF-LH
7	HY-100-6P	6.3	11.5	13.9	1000	2500	110	0.175	M10x1
8	HY-084-8P	8.1	13.3	17.8	840	2100	130	0.2	3/8-18NPTF
9	HY-210-8P	8.0	16.4	21.6	2100	5250	250	0.64	9/16-18UNF-LH
10	HY-320-8P	7.6	22	29.7	3200	8000	300	1.5	9/16-18UNF-LH

### MANULI (ITALY) high pressure rubber hose

No.	Model	In.Dia	Out.Dia	Head Dia	Working pressure	Burst Pressure	Min. Bend Radius	Weight	Fitting
1	HY-075-13R	12.7	26.4	11	750	1875	220	0.905	M24x1.5
2	HY-110-13R	12.7	24.5	15	1100	2750	230	1.125	M24x1.5
3	HY-125-10R	10.0	20.4	18	1250	3125	230	0.815	M24x1.5
4	HY-145-13R	12.7	28.9	30	1450	3625	250	1.870	M24x1.5
5	HY-135-19R	19.0	35.4	16	1350	3375	280	2.570	M36x2