


22k-40k for Small Straight Pipes

The **GOPHER™** - For 2" I.D. & Up

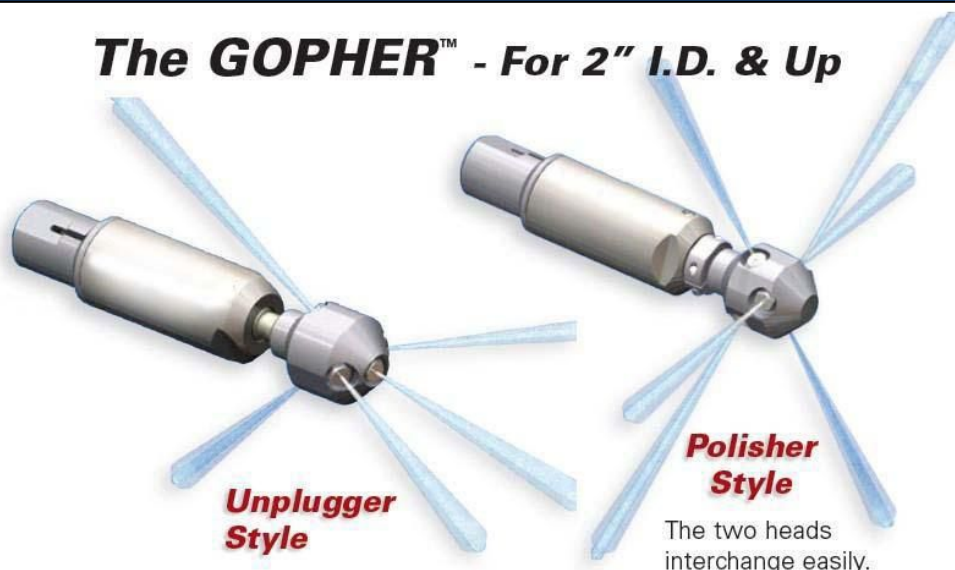

Hard Hitting Action With Controlled Rotation

The **Gopher** is perfect for cleaning piping, evaporator tubes and process drains. It has the power to handle coke, polymers, coatings and latex; anything clogging tubes or pipes 2" or larger.

The **GO-M9** uses **WHY** AP2 Attack Tips and the **GO-H9** uses OS4 Sapphire Tips.

Choosing different jet configurations for unplugging or polishing allows for maximum productivity no matter what task you're faced with.




Gopher™ - Specifications

MODEL	GO-M9™	GO H9-C™
Maximum Pressure	22k psi 1500 bar	40k psi 2800 bar
Rotation Rate	600-1000 rpm	600-1000 rpm
Flow Capacity	25 gpm 90 lpm	12 gpm 40 lpm
Flow Rating	0.84 Cv	0.30 Cv
Weight w/ Head	3 lbs 1.3 kg	3 lbs 1.3 kg
Diameter	1-5/8 in. 41 mm	1-5/8 in. 41 mm
Length	7.8 in. 198 mm	7.8 in. 198 mm
Head Diameter	1-5/8 in. 41 mm	1-5/8 in. 41 mm
Inlet	9/16 MP	9/16 HP
Outlet Ports	AP2	OS4
Head Selection		
Polisher Low-Flow	7-13 gpm 30-50 lpm	3.8-6.6 gpm 20-30 lpm
Model	GO 042-R.14	GO 342-R.14
Polisher High Flow	14-25 gpm 50-90 lpm	7-12 gpm 30-40 lpm
Model	GO 042-R.07	GO 342-R.08
Unplugging Low Flow	8-14 gpm 30-50 lpm	4-7 gpm 20-30 lpm
Model	GO 043-R.17	GO 343-R.18
Unplugging High Flow	15-25 gpm 50-90 lpm	7-12 gpm 30-45 lpm
Model	GO 043-R.08	GO 343-R.08

Centralizers

GO 070 for 4", 5", 6", 8" and 12" pipes.

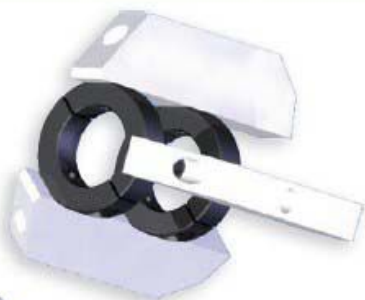

GO 075 for 3" or 4.5" pipes.

